

We manufacture our fully-galvanized products in a variety of gauges, diameters, and lengths (40'+) to meet demanding industry standards and superior corrosion resistance. PT 40 is also available with swaged top rail.

PT 40	High Strength Pipe for Commercial, Industrial and High Security			
PT 20	Light Commercial and Industrial			
PT 15	Light Commercial and Residential			
PTR Residential	Ornamental and Residential			
PTS Squares	Ornamental and Specialty Fencing			
PTC Color	Color Coated Rounds and Shapes			

You'll find our tubing in:

- Chain Link Fences
- Pet Kennels
- Gates

Framework Sizes and Dimensions

Product	O.D. Size	Dec. Equivalent	Wall Thickness	Gauge	Weight Lbs/Ft	Pcs Bundle
Residential	1-3/8	1.315	.047	18	0.64	91
Residential	1-3/8	1.315	.055	17	0.74	91
Residential	1-3/8	1.315	.065	16	0.87	91
PT 15	1-3/8	1.315	.072	15	0.96	91
PT 20	1-3/8	1.315	.080	14	1.06	91
Residential	1-5/8	1.660	.047	18	0.81	61
Residential	1-5/8	1.660	.055	17	0.94	61
Residential	1-5/8	1.660	.065	16	1.11	61
PT 15	1-5/8	1.660	.072	15	1.22	61
PT 20	1-5/8	1.660	.085	14	1.43	61
PT 40	1-5/8	1.660	.111	12	1.84	61
Residential	1-7/8	1.900	.047	18	0.93	61
Residential	1-7/8	1.900	.055	17	1.08	61
Residential	1-7/8	1.900	.065	16	1.27	61
PT 15	1-7/8	1.900	.072	15	1.41	61
PT 20	1-7/8	1.900	.095	13	1.74	61
PT 40	1-7/8	1.900	.120	11	2.28	61
Residential	2-3/8	2.375	.047	18	1.17	37
Residential	2-3/8	2.375	.055	17	1.36	37
Residential	2-3/8	2.375	.065	16	1.60	37
PT 15	2-3/8	2.375	.072	15	1.77	37
PT 20	2-3/8	2.375	.095	13	2.31	37
PT 40	2-3/8	2.375	.130	10	3.12	37
PT 20	2-7/8	2.875	.110	12	3.25	19
PT 40	2-7/8	2.875	.160	9	4.64	19
PT 40	3-1/2	3.500	.160	8	5.71	19
PT 40	4	4.000	.160	8	6.56	19

Square Sizes and Dimensions

Shape	O.D. Size	Gauge	WPF	Pcs/Bundle
Square	2	16	1.71	50
Square	2	15	1.89	50
Square	2	14	2.17	50
Square	2.25	16	1.93	50
Square	2.25	15	2.13	50
Square	2.25	14	2.45	50
Square	2.50	16	2.15	50
Square	2.50	15	2.38	50
Square	2.50	14	2.73	50

All Tubing Available in: GALVANIZED

POLYESTER




POLYOLEFIN



Compliance Specifications for Polyester and Polyolefin Elastomer Powder Coating per ASTM F1043

Polyester	Thickness:	3 mils
	Adhesion:	Compliance with Cross Hatch Test ASTM D3359-B
	Color:	ASTM F934
	Weathering:	ASTMD 1499 Weatherometer 1000 hours
Polyolefin	Thickness:	10mils
	Adhesion:	Compliance to ASTM F1043 8.1.2.1
	Color:	ASTM F934
	Weathering:	ASTMD 1499 Weatherometer 1000 hours

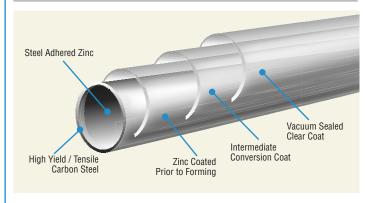

- **US Premier Tube Mills** 3 mil Polyester and 10 mil Polyolefin Powder Coat meets or exceeds the coating requirements of ASTM F1043 "Standard Specification for Strength and Protective Coatings on Steel Industrial Chain Link Fence Framework".
- Our Polyester and Polyolefin Powder Coat Brown, Green and Black colors are in compliance with ASTM F934 "Standard Specification for Standard Colors for Polymer-Coated Chain Link Fence Material".
- Powder Coat Color is available on our PT 40, PT 20, PT 15 and all other tubing we supply.

USPTM quality ensures that all fence framework meets and exceeds ASTM F1043.

PT40 framework meets and exceeds ASTM F1043 "Standard Specification for Strength and Protective Coatings on Steel Industrial Chain Link Fence Framework".

